

NL 000 697

US



**Eur päisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**



**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

00204644.9

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**I.L.C. HATTEN-HECKMAN**

DEN HAAG, DEN  
THE HAGUE, 04/10/01  
LA HAYE, LE

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00204644.9

Anmeldetag:  
Date of filing: 20/12/00  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Electroluminescent color display panel

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

THIS PAGE BLANK (USPTO)

Electroluminescent color display panel

EPO - DG 1

20. 12. 2000

(86)

The invention relates to an electroluminescent color display panel comprising a plurality of pixels arranged in rows and columns to form a grid pattern, each one of the pixels comprising at least two color sections, a first color section which, in operation, emits light of a first color, and a second color section which, in operation, emits light of a second color being different than the first color.

The invention further relates to a method for producing an electroluminescent color display panel, and to an electronic device comprising the electroluminescent color display.

Known are electroluminescent display panels, comprising a plurality of organic electroluminescent devices. An electroluminescent device is a device, which, while making use of the phenomenon of electroluminescence, emits light when the device is suitably connected to a power supply. The term electroluminescence includes several phenomena which have the common feature that light is emitted by an electrical discharge in gasses, liquids and solid materials. Generally, an electroluminescent device comprises one or more layers made of an electroluminescent material disposed between a cathode and an anode. Also known are electroluminescent display panels wherein numerous light emitting devices are formed on a single substrate, arranged in groups in a regular grid pattern, each group forming a picture element also referred to as pixel. Several light emitting devices forming a column of the grid may share a common first electrode, i.e. a common anode also referred to as anode line. Several light emitting devices forming a row of the grid may share a common second electrode, i.e. a common cathode also referred to as cathode line. The individual light emitting devices in a given group, emit light when their associated cathode line and anode line are activated at the same time. Activation may be by rows and columns or, as i.e. in an active matrix, with individual anode pads.

European patent application EP 0 767 599 discloses a 3 color organic electroluminescent display device comprising a matrix of the electroluminescent elements (also referred to herein as pixels). Each pixel in the matrix has one or more emitting devices

for red, green and blue in order to display a color image, each emitting device being associated with an intersection of a column and a row of matrix electrodes. As shown in Fig. 1 of EP 0 767 599, the emitting devices for red are arranged on a column, or vertical line. In the same manner, the emitting devices for green and blue are arranged on vertical lines. A pixel contains emitting devices of three vertical lines. This pixel layout is further referred to as 'V-line'. Alternatively, it is possible to form a pixel pattern with a delta arrangement red, green and blue in the display panel and also draw a bent or meandered cathode pattern on the display panel.

A disadvantage of the prior art electroluminescent color display is that it provides a low image quality, in particular when moving images are displayed on low-resolution displays.

It is an object of the present invention to provide an electroluminescent color display panel with an improved perceived image quality.

To this end, a first aspect of the invention provides an electroluminescent color display panel as claimed in claim 1. A second aspect of the invention provides a method for producing an electroluminescent display panel as claimed in claim 9. A third aspect of the invention provides an electronic device as claimed in claim 12. Advantageous embodiments are defined in the dependent claims.

In accordance with the first aspect of the invention, the positional arrangement of the first and second color sections within a first pixel is different from the positional arrangement of the first and second color sections within a second pixel, wherein the first pixel is adjacent to the second pixel.

The different positional arrangement of the first and second color sections within two adjacent pixels disrupts pure grid-correlated patterns in the image, which patterns may arise from the arrangement of the pixels in a grid. This disruption of the grid-correlated patterns improves the perceived image quality. The adjacent pixels of a first pixel may comprise horizontally, vertically or diagonally neighboring pixels of the first pixel.

In color displays, the chosen arrangement of the color sections within a pixel determines to a large extent the quality of the perceived image. In the state of the art electroluminescent color display panels, the arrangement of the color sections within a pixel is for each pixel the same. Moreover, characteristic for this type of color display panels is that usually the pixels are arranged in a grid pattern comprising vertical columns and horizontal rows. The pure horizontally and/or vertically oriented pixel structures with the same arrangement of the color sections within the pixels, clearly show a lower image quality,

especially on low-resolution displays, because the human eye has a tendency to focus on correlated patterns originating from the pixel layout, which do not belong to the actual image. In the electroluminescent color display panel according to the invention, the pixels are still arranged in a grid pattern comprising vertical columns and horizontal rows. However, pure  
5 horizontally and/or vertically correlated patterns are disrupted because two adjacent pixels comprise a different arrangement of the color sections within the pixel.

An embodiment of the invention as claimed in claim 2 is characterized in that two adjacent pixels in a column comprise a different arrangement of the color sections within the pixel. The disruption of the vertically correlated patterns improves the perceived image  
10 quality, as will be illustrated in the figures.

Naturally, an equivalent embodiment may comprise two adjacent pixels in a row, which comprise a different arrangement of the color sections within the pixel. The disruption of the horizontally correlated patterns improves the perceived image quality.

An embodiment of the invention as claimed in claim 3 is particularly useful  
15 when a printing technique, such as inkjet printing, is used in the manufacture of the color sections. When the first color sections are adjacently arranged on a plurality of parallel, laterally spaced lines, such a line of color sections can be printed by moving the printing head or heads, along the line or lines (the latter, in the case that more than one line is printed simultaneously). It is preferred that also the other color sections which, in operation emit  
20 light of the same color, are adjacently arranged on a plurality of parallel, laterally spaced lines. Preferably, the laterally spaced lines of the various color sections are substantially parallel. Although the pattern of emissive material of this embodiment is still a line-wise correlated color pattern, this correlated pattern is subjectively less annoying than a pure vertical or horizontal one.

25 The first color sections are adjacently arranged, the distance between two printing positions is small. Thus the traveling distance of the printing head between two printing positions is small. This yields an efficiency advantage in the production process, because the time in which the printing head travels between two printing positions and which does not contribute to the printing process, is small.

30 The advantage mentioned in the previous paragraph is even more exploited by an embodiment as claimed in claim 4. In accordance with an embodiment as claimed in claim 4, the first color sections, which are arranged on one slanting line, form a continuous strip of electroluminescent material. When using a printing technique, such as inkjet printing, this embodiment allows printing a continuous line of deposited electroluminescent material of a

specific color. Of course it is possible to interrupt the deposition at the appropriate positions, but this introduces problems in the manufacturing process related to positioning of the printing head above the substrate at the desired places. Furthermore, after activation of the printing head, initial instabilities in the droplet formation may occur, resulting in an undefined layer thickness of the deposited emissive material. These disadvantages are, at least partially, cancelled out by the embodiment of the invention as claimed in claim 4.

For example, the emitting devices for a first color are arranged on a column, or vertical line. In the same manner, the emitting devices for the other colors are arranged on vertical lines. The various lines with emitting devices of a certain color, alternate. A pixel contains emitting devices of each color from neighboring vertical lines, thus the various color sections in a pixel are adjacently positioned in the row direction. Examples of such display panels are i.e. plasma display panels and organic LED display panels.

Plasma display panels consist of a back plate equipped with a plurality of parallel channels. The bottom of and the sidewalls of the channels are coated with red, green and blue phosphors, usually each channel comprises phosphors of one color. The column (address) electrodes are located on the bottom of the channels. The front plate is equipped with a plurality of parallel, laterally spaced row electrodes. A plasma display panel cell is located at the crossing of a row and a column electrode. The front plate and the back plate are sealed together and filled with gas. In operation, light is emitted by an electrical discharge in the gas. In a plasma display panel according to the invention, the channels are arranged on a plurality of parallel, laterally spaced slanting lines with respect to the rectangular grid as defined by the row and column electrodes.

Passive matrix organic LED displays may consist of a transparent substrate which substrate is provided with a plurality of parallel laterally spaced (transparent) column electrodes. The organic LED display further consists of a plurality of parallel laterally spaced continuous lines of organic electroluminescent material of a specific color (i.e. red, green or blue). The lines of organic electroluminescent material are usually oriented parallel to the column electrodes. Perpendicular to the column electrodes and on top of the organic electroluminescent material, the row electrodes are positioned. In operation, the individual light emitting devices of the organic LED display, emit light when their row electrode and column electrode are activated at the same time. In the organic LED display panel according to the invention, the lines of organic electroluminescent material are arranged on a plurality of parallel, laterally spaced slanting lines with respect to the rectangular grid as defined by the row and column electrodes.



In an embodiment of the invention as claimed in claim 5, the acute angle between a vertical column and the slanting lines lies in a range of + 10 and - 10 degrees around a preferred angle  $\alpha$ , and the preferred angle  $\alpha$  is equal to:

$$\alpha = \arctan\left(\frac{P_r}{n \cdot P_c}\right)$$

- 5 wherein n is the number of color sections in a pixel,  $P_r$  is the pitch of the pixels in the row direction, and  $P_c$  is the pitch of the pixels in the column direction. It is preferred with this embodiment that the color sections in a pixel are positioned side by side in row direction. When using this preferred angle, the color sections in the pixels in the same column are shifted in row direction with respect to the color sections in a neighboring pixel. The extent
- 10 of the shift is such that the layout of the color sections in a pixel of the  $(n+1)^{\text{st}}$  row in a first column, counting from said first row, is equal to the layout of the color sections in a pixel of the first row in said first column.

- This design rule is also applicable when the color sections in a pixel are positioned side by side in the column direction. In this case, the acute angle between a
- 15 vertical column and the slanting lines lies in a range of + 10 and - 10 degrees around a preferred angle  $\beta$ , and the preferred angle  $\beta$  is equal to:

$$\beta = \arctan\left(\frac{n \cdot P_c}{P_r}\right)$$

- When using this preferred angle, the color sections in the pixels in the same row are shifted in column direction with respect to the color sections in a neighboring pixel. The extent of the
- 20 shift is such that the layout of the color sections in a pixel of the  $(n+1)^{\text{st}}$  column in a first row, counting from said first column, is equal to the layout of the color sections in a pixel of the first column in said first row.

In accordance with a second aspect of the invention, a method for manufacturing an electroluminescent color display panel comprises the steps of:

- 25
- forming a plurality of parallel, laterally spaced first electrode strips on a substrate,
  - arranging a plurality of parallel, laterally spaced electroluminescent strips, each strip, in operation emits light of one of at least a first or a second color, which strips of different colors are positioned side by side, in a repeating pattern
  - forming a plurality of parallel, laterally spaced second electrode strips, which second
- 30 electrode strips cross the plurality of first electrode strips such that, in operation, an

individual light emitting device is created at the crossing of a first and a second electrode strip,

characterized in that the electroluminescent strips, are arranged on a plurality of parallel, laterally spaced slanting lines with respect to a grid formed by the first and second electrode strips. The deposition of emissive material may be guided by a pattern of resist banks, oriented along the slanting lines. The emissive material is deposited between two resist banks. Printing can in this arrangement occur in a continuous process, without the need of synchronized deposition. The resist banks prevent the mixing of the printed electroluminescent material for different color sections.

In the case that the electroluminescent strips comprise an organic electroluminescent material, the organic electroluminescent material is preferably deposited using an inkjet printer.

In accordance to a third aspect of the invention, an electronic device comprises an electroluminescent color display panel as claimed in claim 1. The improved perceived image quality on low-resolution displays is especially advantageous in handheld or portable electronic devices such as, for example, mobile phones, personal organizers and calculators.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 schematically shows an equivalent-circuit diagram of an electroluminescent display panel,

Fig. 2 is a schematic view of a part of an electroluminescent display panel in accordance with the prior art, where a pixel contains emitting devices of three vertical lines (V-line pixel layout),

Fig. 3 is a schematic view of a part of an electroluminescent display panel in accordance with the invention, where two adjacent pixels in a column comprise a different positional arrangement of the color sections within the pixel,

Fig. 4 shows the result of a simulation of a picture as displayed on an electroluminescent display panel of the prior art,

Fig. 5 shows the result of a simulation of a picture as displayed on an electroluminescent display panel in accordance with the invention,

Fig. 6 is a schematic view of a part of an other embodiment of the electroluminescent display panel in accordance with the invention, where the color sections of the plurality of pixels, which color sections, in operation, emit the same color are arranged on one slanting line, form a continuous color determining strip,

5 Fig. 7 is a schematic view of the embodiment of fig. 6, where a possible layout of a column and a row electrode is presented, and

Fig. 8 through 10 show examples of electronic devices comprising an electroluminescent color display panel as claimed in claim 1.

10 Fig. 1 schematically shows an electrical equivalent-circuit diagram of a part of an electroluminescent color display panel 1 comprising a plurality of light emitting sections arranged in n rows 2 and m columns 3; each intersection of a row 2 and a column 3 electrode forms a light emitting section. This display panel further includes a row-selection circuit 21  
15 (for example a multiplex circuit) and a data register 22. Information presented from the exterior, for example a video signal, is processed in a control unit 23 which, dependent upon the information to be displayed, loads the individual parts of the data register 22. Mutual synchronization between the selection of the rows and the presentation of voltages to the column electrodes takes place by means of the control unit 23 via control lines 24.

20 Fig. 2 is a schematic view of a part of an electroluminescent display panel 1 of the prior art. For the sake of clarity, this and subsequent drawings are not drawn to scale and some parts have been drawn enlarged relative to others. The electroluminescent display panel 1 comprises a plurality of pixels 4 arranged in rows 2 and columns 3 to form a grid pattern, or a matrix. Each pixel 4 of this example comprising three color sections: a red R, a green G and  
25 a blue B color section which, in operation, may emit red, green or blue light respectively. This pixel configuration is used in matrix addressed electroluminescent display panels. Scanning of a picture is done, for example, by row at a time while putting the appropriate signals on the columns.

30 According to the invention, the positional arrangement of the color sections within each pixel is different from the positional arrangement of the color sections within at least one adjacent pixel. An embodiment of the electroluminescent display panel 1 in accordance with the invention is shown in Fig. 3. In this embodiment, the RGB color sections are shifted along the direction of the rows 2. In the pixel 4 on the crossing of column 3 and row 2, the color sections are arranged, from left to right, as green G, blue B and red R. In the

pixel 6 on the crossing of column 3 and row 5, the color sections are arranged, from left to right, as red R, green G and blue B. Thus, two adjacent pixels 4, 6 in a column 3 comprise a different positional arrangement of the color sections within the pixel. Moreover, the color sections R, G or B of the plurality of pixels, which color sections, in operation, emit the same color, are adjacently arranged on a plurality of parallel, laterally spaced slanting lines 7 with respect to the grid pattern of the pixels. The acute angle between a vertical column 3 and a slanting line 7 is equal to angle  $\alpha$ :

$$\alpha = \arctan\left(\frac{P_r}{n \cdot P_c}\right)$$

wherein  $n$  is the number of color sections in a pixel (in this example  $n = 3$ : R, G and B),  $P_r$  is the pitch of the pixels 4, 6 in the row 2, 5 direction, and  $P_c$  is the pitch of the pixels 4, 6 in the column 3 direction. The pitch is the distance between the centers of two adjacent pixels 4, 6.

Corresponding to the pixel configurations of Fig. 2 and 3, Fig. 4 and 5 show the result of a simulation which compares an electroluminescent display panel having a V-line pixel layout (as in Fig. 2) and an electroluminescent display panel having a pixel layout according to the invention (as in Fig. 3). Although the pixel layout of Fig. 3 still has a line-wise correlated RGB pattern (along lines 7), the perceived image quality of Fig. 5 is improved when compared with the image of Fig. 4.

In some electroluminescent displays panels 1, such as plasma display panels and organic LED display panels, the electroluminescent material is deposited using printing techniques, such as inkjet printing. The use of inkjet printing to deposit the luminescent material in the color sections R, G or B is applied most successfully if a line 8 of deposited electroluminescent material of a specific color can be printed continuously. Of course, it is possible to interrupt the inkjet deposition at the appropriate positions, but this introduces problems in the manufacturing process related to the positioning of the inkjet orifice above the substrate at the desired place. Furthermore, after activation of the piëzo in the printing head, initial instabilities in the droplet formation occur, resulting in an undefined layer thickness of the deposited emissive material. It is therefore proposed to print the color sections not along the columns 3, but oriented diagonally across the columns 3. A schematic view of an example of the proposed pixel layout is presented in Fig. 6. Printing can in this embodiment of the invention occur continuously along the line 8, without the need of position synchronized deposition. With this pixel layout, a triplet color section arrangement is obtained that, to some extent, resembles the pixel layout is presented in Fig. 3, while circumventing the above mentioned issues related to operation of the inkjet printer.

The deposition of the electroluminescent material may be guided by a pattern of resist banks 9, which are oriented diagonally across the columns. The electroluminescent material is deposited between two resist banks 9, which prevent a mixing of the materials, which would result in unwanted and undefined color mixing.

5 To address the color sections of the embodiment of Fig. 6, it is preferred to use row 10 and column 11 electrodes as depicted in Fig. 7. Because the color sections of the embodiment of Fig. 6 will have a diamond like shape, the column electrodes 11 may have a stepped pattern as shown in Fig. 7.

10 The improved perceived image quality on low-resolution displays according to the invention is especially advantageous in handheld or portable electronic devices such as mobile phones, personal organizers and calculators. Examples of such electronic devices comprising an electroluminescent color display panel 1 as claimed in claim 1, are depicted in Fig. 8 through 10; Fig. 8 shows a mobile phone comprising an electroluminescent color display panel 1 according to the invention, Fig. 9 shows a calculator comprising an  
15 electroluminescent color display panel 1 according to the invention, and Fig. 10 shows a personal organizer comprising an electroluminescent color display panel 1 according to the invention.

In summary, the positional arrangement of the color section in each pixel of an electroluminescent display panel is different from the positional arrangement of the color  
20 sections in at least one adjacent pixel. This yields an improved image quality as perceived by the viewer, in particular when moving images are displayed on low-resolution displays. A preferred embodiment of the invention is an electroluminescent display panel where the color sections are arranged on continuous lines, which are oriented to run diagonally across the display panel.

25 It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. For example the functionality of columns and rows may be transposed without departing from the invention.

The invention may also be applied in active matrix organic LED displays,  
30 where column and row electrodes are used for addressing a color section.

In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in a claim.

**THIS PAGE BLANK (USPTO)**

10

EPO - DG 1

15.12.2000

## CLAIMS:

20.12.2000

(86)

1. An electroluminescent color display panel comprising a plurality of pixels arranged in rows and columns to form a grid pattern, each one of the pixels comprising at least two color sections of which a first color section for emitting light of a first color, and a second color section for emitting light of a second color being different than the first color, characterized in that the positional arrangement of the first and the second color section within a first one of the pixels, further referred to as the first pixel, is different from the positional arrangement of the first and second color sections within a second one of the pixels, further referred to as the second pixel, wherein the first pixel is adjacent to the second pixel.

10

2. An electroluminescent color display panel as claimed in claim 1, wherein the first pixel and the second pixel are arranged in the same column.

3. An electroluminescent color display panel as claimed in claim 1 or 2, wherein the first color sections are adjacently arranged on parallel, laterally spaced apart, slanting lines with respect to the column direction.

4. An electroluminescent color display panel as claimed in claim 3, wherein the first color sections, which are arranged on one slanting line, form a continuous strip of electroluminescent material.

5. An electroluminescent color display panel as claimed in claim 3 or 4, wherein the acute angle between a vertical column and the slanting lines lies in a range of + 10 and - 10 degrees around a preferred angle  $\alpha$ , and the preferred angle  $\alpha$  is equal to:

$$\alpha = \arctan \left( \frac{P_r}{n \cdot P_c} \right)$$

wherein  $n$  is the number of color sections in a pixel,  $P_r$  is the pitch of the pixels in the row direction, and  $P_c$  is the pitch of the pixels in the column direction.

6. An electroluminescent color display panel as claimed in claim 1, 2, 3, 4 or 5, wherein a color section comprises a layer of an organic electroluminescent material.

5 7. An electroluminescent color display panel as claimed in claim 6, wherein the organic electroluminescent material is a polymer.

8. An electroluminescent color display panel as claimed in claim 1, 2, 3, 4 or 5, wherein a color section comprises a layer of a phosphor material which is excited by a  
10 plasma discharge.

9. A method of producing an electroluminescent color display panel, said method:

- forming a plurality of parallel, laterally spaced first electrode strips on a substrate,
- 15 • arranging a plurality of parallel, laterally spaced electroluminescent strips, each strip, in operation emits light of one of at least a first or a second color, wherein strips of different colors are positioned side by side, in a repeating pattern,
- forming a plurality of parallel, laterally spaced second electrode strips, which second electrode strips cross the plurality of first electrode strips such that, in operation, an  
20 individual light emitting device is allocated at the crossing of a first and a second electrode strip,

characterized in that the electroluminescent strips, are arranged on a plurality of parallel, laterally spaced slanting lines with respect to a grid formed by the first and second electrode strips.

25

10. A method as claimed in claim 9, wherein the second electrode strips cross the first electrode strips substantially perpendicularly, which yields a substantial rectangular grid formed by the first and second electrode strips.

30 11. A method as claimed in claim 9 or 10, wherein the acute angle between the first or the second electrode strips and a slanting line lies in a range of + 10 and - 10 degrees around a preferred angle  $\alpha$ , and the preferred angle  $\alpha$  is equal to:

$$\alpha = \arctan\left(\frac{P_r}{n \cdot P_c}\right)$$



wherein  $n$  is the number of color sections in a pixel,  $P_r$  is the pitch of the pixels in the row direction, and  $P_c$  is the pitch of the pixels in the column direction.

12. A method as claimed in claim 9 or 10, wherein the electroluminescent strips

5 comprise an organic electroluminescent material, which organic electroluminescent material is deposited using an inkjet printer.

13. An electronic device comprising an electroluminescent color display panel as claimed in claim 1.

THIS PAGE BLANK (USPTO)

EPO - DG 1 15.12.2000  
20. 12. 2000

(86)

## ABSTRACT:

The positional arrangement of the color section in each pixel of an electroluminescent display panel is different from the positional arrangement of the color sections in at least one adjacent pixel. This yields an improved image quality as perceived by the viewer, in particular when moving images are displayed on low-resolution displays.

- 5 A preferred embodiment of the invention is an electroluminescent display panel where the color sections are arranged on continuous lines, which are oriented to run diagonally across the display panel.

Fig. 6

THIS PAGE BLANK (USPTO)

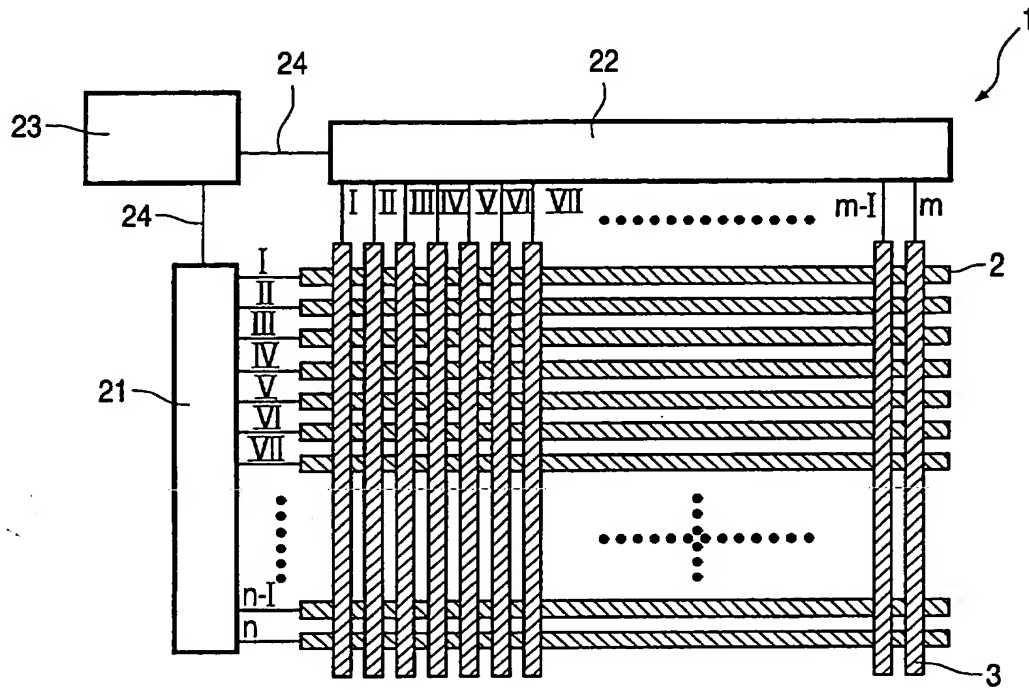


FIG. 1

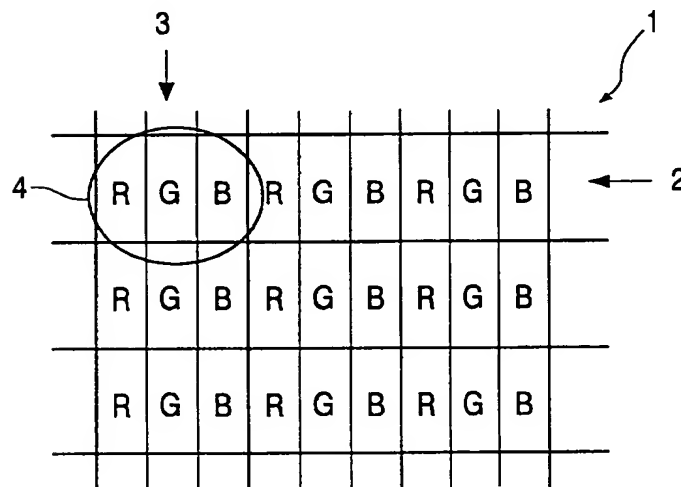


FIG. 2



3/5

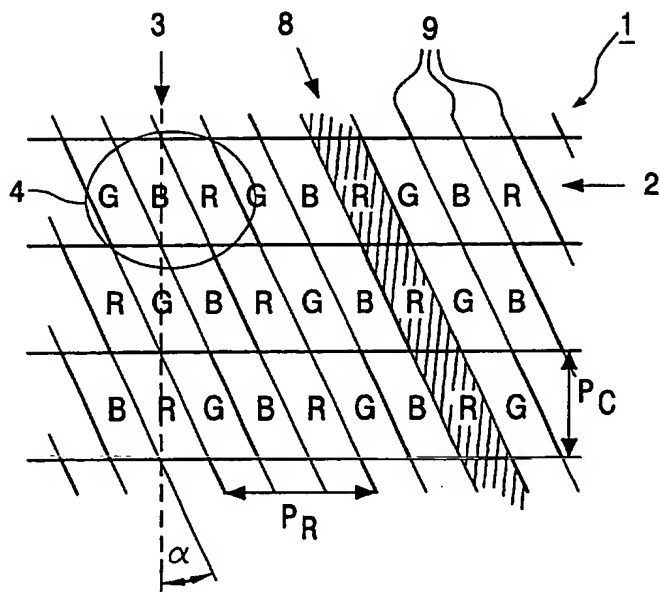


FIG. 6

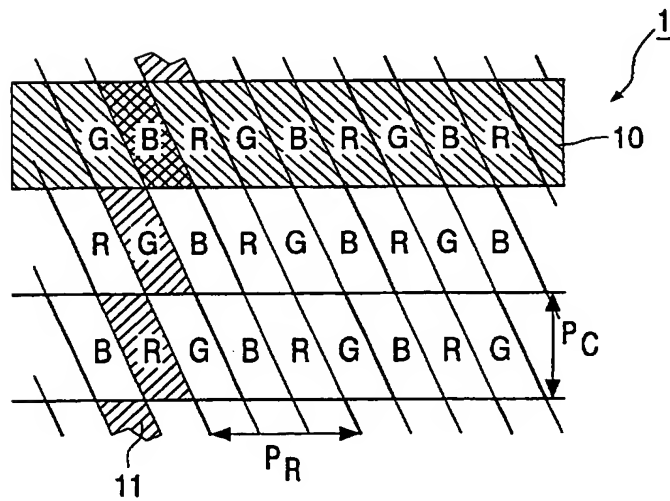


FIG. 7

4/5

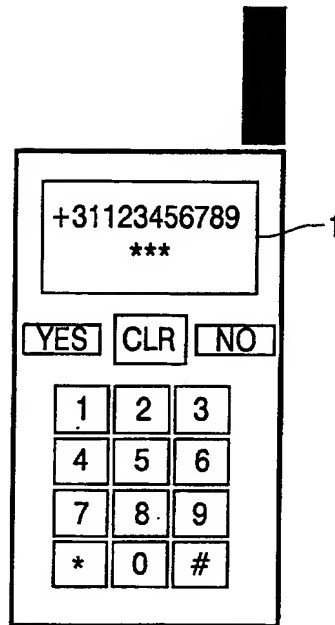


FIG. 8

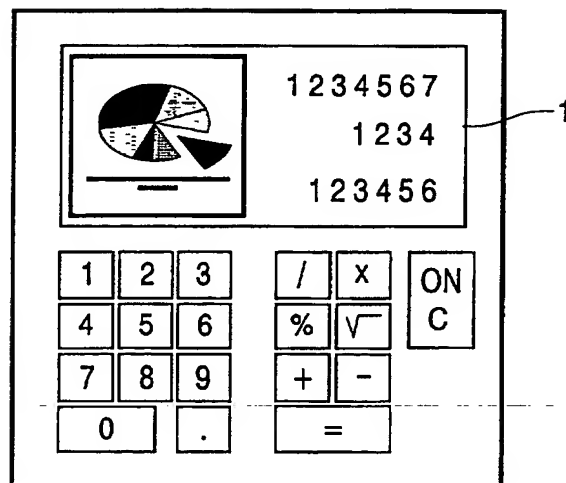


FIG. 9



5/5

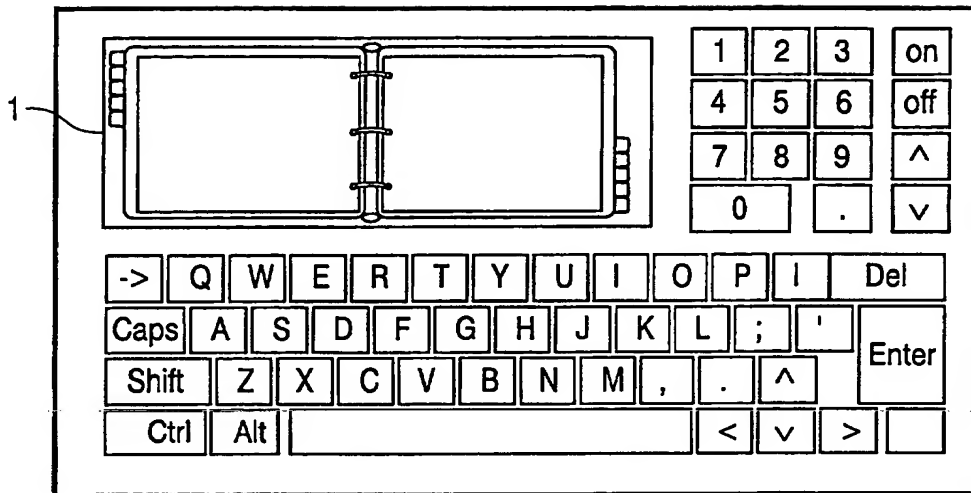


FIG. 10

**THIS PAGE BLANK (USPTO)**